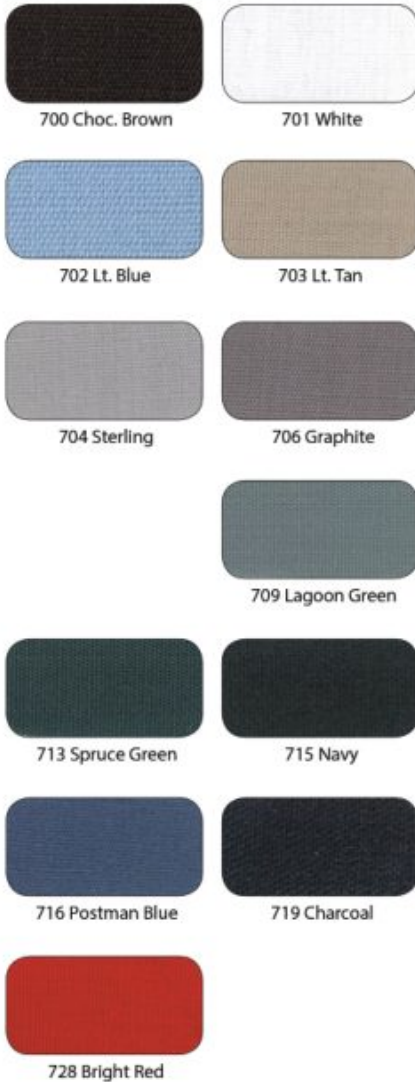


HEAT-SEAL MENDING MATERIALS: INDUSTRIAL

SHIRT WEIGHT

65/35 Poplin



PANT WEIGHT

65/35 Twill

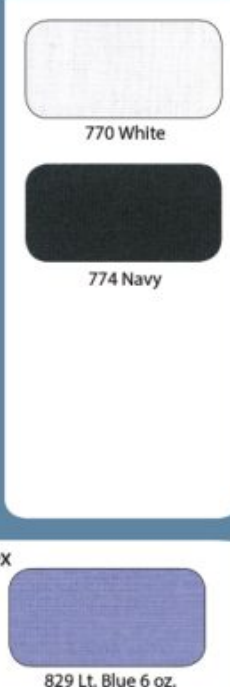


FLAME RETARDANT





100% Cotton



SPUN POLY



Institutional

BARRIER CLOTH			100% Polyester	50/50	ESD	Taffeta
						
932 C3 White Conductive	934 White Non-Conductive	935 Yellow Non-Conductive		925 Barbac/Misty Blue	943 Navy	945 White
						
949 C3 Navy	950 C1 Royal Blue			926 Misty Green	944 White	946 Navy
Baxter			Herringbone		Microdenier	
	936 Blue Safecare			947 White		948 Navy

SHEETING		Cotton	Percal
			
002 White Type 140	060 Misty Green Type 140		
			
084 Jade Green Type 140			751 White

MISCELLANEOUS	
	
818 Incontinent Pink	
	
819 Incontinent Blue	820 Incontinent Mint Green Satinlite

THERMOPLY HEAT-SEAL ADHESIVE

A do-it-yourself patch making adhesive film for small volume or special mending needs and for coating new or used embroidered emblems for applications by heat-seal equipment.

Supplied in roll form or die-cut in five sizes and two shapes. .005" thick

Ask about our
quantity discounts

CUSTOM LAMINATING

Thermopatch recognizes our customers need to have mending patches for a broader range of materials than it is economically feasible for us to supply due to low volume usage and fabric manufacturer's minimum orders. As a solution to this, Thermopatch will custom laminate customer's materials and die-cut patches for their use.

For more information on these and other Thermopatch products, call or e-mail us.



Canada
Europe
USA & LATAM

tel. +1 519 748-5027
tel. +31 36 549 11 11
tel. +1 315 446-8110

fax +1 519 748-154
fax +31 36 532 03 98
fax +1 315 445-8046

e-mail sue-ann.roussel@averydennison.com
e-mail sales@thermopatch.nl
e-mail TPC-Sales@averydennison.com

All fabrics and colors
come in pre-cut
squares, rectangles,
rounds and
50 yard rolls.

Contact customer
service for sizes and
price list.



Flame Resistant Heat-Seal Mending Materials

Inherent				Twill
				
CL0060-H Grey 5.3 oz	CL0061-H Navy 5.3 oz	CL0062-H Navy 6.4 oz	CL0064-H Navy 450	CL0076-H Navy
				
CL0065-H Khaki 450	CL0066-H Light Blue 450	CL0073-H Royal Blue 6.5 oz	CL0074-H Navy 8.5 oz	CL0077-H Charcoal
Cotton			Tuntex	
				
CL0067-H 100% Cotton Denim	CL0068-H Navy 6.5 oz	CL0069-H Navy 8.0 oz	CL0078-H Navy	CL0079-H Lt Grey
				
CL0070-H Khaki 6.5 oz	CL0071-H Med. Blue 6.5 oz	CL0072-H ANSI 6.4 oz	CL0080-H Cosmic Blue	
			Carhartt	
				
			CL0081-H Navy	CL0082-H Navy
				
			CL0083-H Charcoal	

Ordering information:

Phone: 1-800-252-6555 press 0 and Customer Service will assist you

Fax: 1-315-445-8046

E-mail: sales@thermopatch.com

Note: All boxes contain 200 pre-cut 2" square patches. For pricing, see material column 800-912

Thermopatch has a minimum order of \$50 per order.

See our standard mending chart for other available materials.

Recommended heat-seal settings:

400°F Top heat

350°F - 375°F Bottom heat

10 Seconds

50 p.s.i.

Standard rubber pad 17-20 Shore durometer type A density

www.thermopatch.com